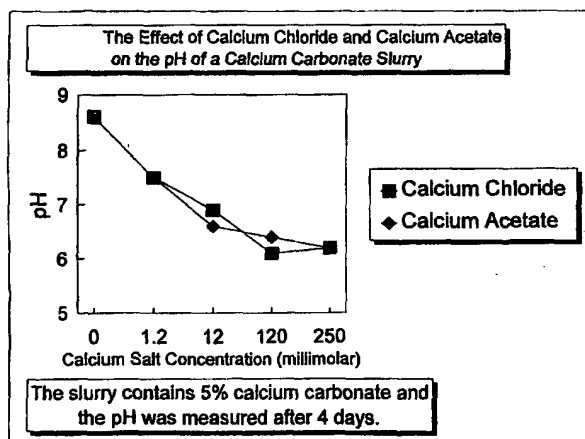


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D21H	A2	(11) International Publication Number: WO 98/29601 (43) International Publication Date: 9 July 1998 (09.07.98)
(21) International Application Number: PCT/US97/23151 (22) International Filing Date: 5 December 1997 (05.12.97) (30) Priority Data: 08/774,662 30 December 1996 (30.12.96) US (71) Applicant: MINERALS TECHNOLOGIES INC. [US/US]; 405 Lexington Avenue, New York, NY 10174-1901 (US). (72) Inventor: DRUMMOND, Donald, Kendall; 11 Laurel Lane, Glenmoore, PA (US). (74) Agents: RICHARDS, John; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US) et al.		(81) Designated States: AU, BR, CA, CN, JP, KR, MX, NO, NZ, PL, RU, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: THE USE OF CALCIUM CARBONATE IN AN ACIDIC AQUEOUS MEDIA**(57) Abstract**

The present invention relates to an acid-stabilized calcium carbonate slurry having a pH of less than 7, preferably between about 6 and about 7, containing water, calcium carbonate, preferably precipitated calcium carbonate, and an acid-stabilizer of a water soluble calcium salt, a weak acid, a chelating agent, a weak acid capable of chelating calcium ion, or a mixture thereof. The acid-stabilizer is present in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and an acidic pH. In a typical acid-stabilized calcium carbonate slurry of the invention, the acid-stabilizer is present in an amount sufficient to provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar. The invention also relates to a method of making the acid-stabilized calcium carbonate slurry of the invention, to a method of forming a filled paper, that includes the step of adding the acid-stabilized calcium carbonate slurry of the invention to a papermaking pulp in a process for making acid paper, and to a filled paper produced according to the method of the invention.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

THE USE OF CALCIUM CARBONATE IN AN
ACIDIC AQUEOUS MEDIA
FIELD OF THE INVENTION

The present invention is directed to an acid-stabilized calcium
5 carbonate slurry having a reduced pH, and a process for producing the slurry. This
acid-stabilized calcium carbonate slurry is useful as a filler in neutral or acid paper
to improve the optical properties of the paper.

BACKGROUND OF THE INVENTION

Fillers are typically added to paper during the paper making process
10 to improve the optical properties of the paper, such as brightness. In acid
papermaking, which is often used for making paper from a groundwood pulp, the
pH of the paper stock is generally substantially less than 7, and is normally in the
range of from about 4 to about 6. In comparison, in neutral papermaking, the pH is
normally maintained in the range of from about 6.8 to about 7.5. Therefore, in acid
15 papermaking and under certain conditions in neutral papermaking, a filler material
that is stable and resistant to attack by acid under weakly acidic to acidic conditions
is required.

Titanium dioxide and calcined clay have often been used as fillers in
neutral and acidic paper. However, these materials, and titanium dioxide in
20 particular, are expensive, thus adding to the cost of the paper.

Both ground natural and precipitated calcium carbonate are used as a
filler material for alkaline paper, which is typically produced from a paper stock
having a pH of about 8. The resulting paper has enhanced optical properties
without the cost of more expensive fillers. However, calcium carbonate normally
25 decomposes in acidic aqueous media, and, thus, generally cannot be used as a filler
in acid paper unless the calcium carbonate filler is acid-stabilized, that is, made
resistant to decomposition at a pH of less than 7. Because alkaline conditions and
alkaline fillers typically have a negative impact on the properties of groundwood
paper, a calcium carbonate filler can only be used with a groundwood paper pulp if
30 the calcium carbonate filler is acid-stabilized for use under acidic conditions.

Calcium carbonate filler materials, both precipitated and ground
natural, have been treated or modified in the prior art for various reasons. In the

- 2 -

case of precipitated calcium carbonate, the treatment or modification has been performed both during and after the precipitation process. Treatments include coating calcium carbonate particles with a non-reactive material, such as a polysaccharide, fatty acid, or gum material, and treating calcium carbonate particles or a slurry of calcium carbonate with various weak acids and bases, salts, and chelating agents.

In particular, U.S. Patent No. 4,240,870 discloses the addition of at least one phosphoric acid, such as orthophosphoric acid, metaphosphoric acid, tripolyphosphoric acid, pyrophosphoric acid, tetrapolyphosphoric acid, and hexapolyphosphoric acid, or the sodium, potassium, or zinc salt of at least one phosphoric acid to an aqueous calcium hydroxide suspension as the first step of a multi-step process for the production of precipitated calcium carbonate. Similarly, U.S. Patent No. 4,244,933 discloses the addition of one of the phosphoric acids or salts disclosed in 4,240,870 as an ingredient in either the first or second step of a multi-step process for the production of precipitated calcium carbonate.

U.S. Patent No. 4,018,877 discloses the addition of a complex-forming agent, such as a polyphosphate, e.g., sodium hexametaphosphate, during or after the end of the first carbonation step in a multi-step process for the production of precipitated calcium carbonate. Preferably, the agent is added after the bulk of the calcium carbonate precipitation is complete. Alternatively, the complex forming agent is added during a subsequent ageing or carbonation step.

U.S. Patent No. 4,157,379 disclose the addition of a soluble metal salt, such as an alkali metal phosphate, after the primary carbonation of an aqueous suspension of calcium hydroxide.

Laid-open Japanese Patent Application No. 090821/60 discloses a process for the preparation of calcium carbonate in which a condensed phosphoric acid or salt thereof is added to the viscous gelatinous emulsion formed from the carbonation of an aqueous dispersion of calcium hydroxide. The condensed phosphoric acid may be hexametaphosphoric acid, pyrophosphoric acid, tripolyphosphoric acid, polyphosphoric acid or ultraphosphoric acid. Laid-open Japanese Patent Application No. 090822/60 discloses the same process with the addition of a magnesium-containing compound in the dispersion of calcium

- 3 -

carbonate.

However, all of the references cited above disclose processes that require the addition of a phosphoric acid or phosphate salt during a process for the production of precipitated calcium carbonate.

5 U.S. Patent No. 4,793,985 discloses the addition of a dispersing agent, such as a water soluble salt of polyphosphoric acid or a phosphate, particularly, sodium hexametaphosphate, to a slurry of ground calcium carbonate to improve the distribution of solids within the liquid, as part of a process for producing an ultrafine calcium carbonate.

10 U.S. Patent No. 4,610,801 discloses the use of polyphosphoric or polyphosphates in a slurry of mineral particles, such as calcium carbonate, in waste treatment.

U.S. Patent No. 4,219,590 discloses the treatment of calcium carbonate, having an average particle diameter of no more than 20 μm , with an acid
15 gas that is capable of reaction with calcium carbonate.

Japanese Patent No. 030812/82 discloses improving the surface of calcium carbonate particles by adding an aqueous solution of a condensed phosphate, such as a metaphosphate or pyrophosphate to an aqueous calcium carbonate suspension. As a result, the calcium carbonate particles have a resistance
20 to acid, and the pH of the particles is reduced by 0.1 to 5.0.

U.S. Patent Nos. 5,043,017 and 5,156,719 disclose an acid-stabilized calcium carbonate for use as a filler in neutral to weakly acidic paper. These patents state that the acid-stabilized calcium carbonate is able to resist degradation under mildly acidic conditions due to a buffering action between an absorbed or
25 reacted calcium-chelating agent or conjugate base on the surface of the calcium carbonate and a weak acid in solution in the calcium carbonate slurry.

U.S. Patent No. 5,505,819 discloses a process for producing neutral paper from wood-containing pulp and a natural calcium carbonate filler. The pH of the stock is maintained in the range of 6.7 to 7.3 by the addition of a pH reducing
30 and buffering agent, preferably phosphoric acid.

U.S. Patent No. 5,531,821 discloses an acid resistant calcium carbonate filler for use in making neutral to weakly acidic paper, comprising a

- 4 -

mixture of calcium carbonate and about 0.5 to 10 percent, based on the dry weight of calcium carbonate, of a cationic salt and an anionic salt.

There still remains a need for improved acid-stabilized calcium carbonate materials and methods for producing such materials for use in acid papermaking. The present invention provides one solution to satisfy this need.

SUMMARY OF THE INVENTION

The present invention relates to an acid-stabilized calcium carbonate slurry having a pH of less than 7, preferably between about 6 and about 7, which may be used as a filler for making a filled acid paper, which slurry comprises water, calcium carbonate, and an acid-stabilizer of one of a water soluble calcium salt, a weak acid, or a chelating agent and certain mixtures thereof. The acid-stabilizer is present in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and an acidic pH. Calcium carbonate is present in the acid-stabilized calcium carbonate slurries of the invention in an amount useable in papermaking processes, typically about 1 to about 40 percent by weight, preferably about 5 to about 30 percent by weight, most preferably about 15 to about 25 percent by weight, and is preferably precipitated calcium carbonate.

In a first embodiment of the invention, the acid-stabilizer is a water soluble calcium salt, and is typically present in an amount sufficient to provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar. Preferred salts include calcium sulfate, calcium acetate, calcium nitrate, calcium citrate, a calcium halide, e.g., calcium chloride, and mixtures thereof.

In a second embodiment of the invention, the acid-stabilizer is a weak acid, and is present in an amount sufficient to provide a weak acid concentration of from about 0.1 to about 1000 millimolar, preferably from about 0.2 to about 100 millimolar. Preferred weak acids include carbonic acid, phosphoric acid, sulfurous acid, or a carboxylic acid, where the carbonic acid is typically provided by the addition of carbon dioxide gas. In addition to the weak acid, the acid-stabilizer may further comprise a water soluble calcium salt in an amount sufficient to provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar.

- 5 -

In an additional embodiment of the invention, the acid-stabilizer comprises a water soluble calcium salt in an amount sufficient to provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar, and a chelating agent in an amount sufficient to provide a
5 chelating agent concentration of from about 0.01 to about 1000 millimolar, preferably from about 0.1 to about 100 millimolar. Preferred chelating agents include polycarboxylates, such as sodium ethylenediaminetetraacetic acid or sodium polyacrylate, polyphosphates, phosphonates, polyphosphonates.

In a further embodiment of the invention, the acid-stabilizer
10 comprises a weak acid capable of chelating calcium ion, present in a concentration of from about 0.001 to about 1000 millimolar, preferably from about 0.01 to about 100 millimolar. Preferred weak acids capable of chelating calcium ion include polycarboxylic acids, polyacrylic acid, sulfonic acid, polyphosphonic acid, or a compound containing a carboxylic acid group such as ethylenediaminetetraacetic
15 acid (EDTA), nitrilotriacetic acid (NTA), diethylenetriamine-pentaacetic acid (DTPA), or a compound containing a phosphonic acid group such as nitrilotri(methylene)triphosphonic acid.

The invention also relates to a method of forming a filled paper, which comprises adding the acid-stabilized calcium carbonate slurry comprising any
20 of the acid-stabilizers described above to a papermaking pulp in a process for making acid paper, and thereafter forming a filled paper by that process. In addition, the invention relates to a method for making an acid-stabilized calcium carbonate slurry by forming a slurry of water, calcium carbonate, and an acid-stabilizer of a water soluble calcium salt, a weak acid, a chelating agent, a weak
25 acid capable of chelating calcium ion, or a mixture thereof. The water soluble calcium salt, weak acid, chelating agent, weak acid capable of chelating calcium ion, or mixture thereof is added in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and an acidic pH of less than 7. In the preferred method, an aqueous slurry of calcium
30 hydroxide is first carbonated to form a precipitated calcium carbonate slurry. The invention also relates to an acid paper, which contains a filler produced in accordance with the invention.

- 6 -

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a graph showing the effect of calcium chloride and calcium acetate on the pH of a calcium carbonate slurry.

Fig. 2 is a graph showing the effect of carbon dioxide and calcium ion on the pH of a calcium carbonate slurry.

Fig. 3 is a graph showing the effect of calcium ion plus chelating agent on the pH of a calcium carbonate slurry.

Fig. 4 is a graph showing the effect of a phosphonic acid containing compound on the pH of a calcium carbonate slurry.

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to an acid-stabilized calcium carbonate that can be used in neutral and acidic aqueous media with little or no decomposition. In particular, the present invention relates to a calcium carbonate filler material for use in neutral or acid paper. The calcium carbonate may be either precipitated or ground natural, but is preferably precipitated. Unless otherwise stated, all references herein to calcium carbonate indicate that either precipitated or ground natural calcium carbonate may be utilized.

An acid-stabilized calcium carbonate according to the invention for use as a filler material in neutral or acid paper is obtained by treating a calcium carbonate slurry in a manner that increases the concentration of calcium ion, Ca^{2+} , to provide a calcium carbonate slurry having an acidic pH, rather than the alkaline pH of an untreated calcium carbonate slurry. It has been now discovered that suppressing the pH of a calcium carbonate slurry by increasing the calcium ion concentration provides a calcium carbonate material that is stable in a neutral or acidic aqueous media, such as that used in a paper making machine or process used for making neutral or acid paper. The acid-stabilized calcium carbonate material is obtained by adding to a calcium carbonate slurry at least one acid-stabilizer of a water soluble calcium salt, a weak acid, or a chelating agent, a mixture of a water soluble calcium salt and a weak acid, or a mixture of a water soluble calcium salt and a chelating agent. Each of these acid-stabilizers, when added to a calcium carbonate slurry, increase the calcium ion concentration, providing a calcium carbonate slurry having a suppressed, acidic pH.

- 7 -

In one embodiment of the invention, a water soluble calcium salt is added to a calcium carbonate slurry as an acid-stabilizer. The addition of soluble calcium ion lowers the pH of the calcium carbonate slurry by lowering the concentration of soluble carbonate ion, CO_3^{2-} . In addition, calcium ions are slightly acidic in aqueous solution. Preferred water soluble calcium salts include calcium halides, in particular, calcium chloride, calcium sulfate, calcium acetate, calcium nitrate, and calcium citrate. However, any water soluble calcium salt that will provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar can be used in the present invention. Alternatively, the salts can be generated in situ by adding an appropriate amount of an acid that will react with calcium carbonate to produce the desired concentration of calcium salt. For example, hydrochloric acid can be added to produce calcium chloride, nitric acid can be added to produce calcium nitrate, or acetic acid can be added to produce calcium acetate.

In a second embodiment of the invention, the pH of the calcium carbonate slurry is suppressed and the calcium ion concentration is increased by the addition of an acid-stabilizer of a weak acid or the combination of a weak acid and a water soluble calcium salt. The weak acid-stabilizes the calcium carbonate slurry by creating a low pH buffered system with the calcium carbonate. The addition of calcium ion to this buffered system further suppresses the pH of the calcium carbonate slurry in the manner described above. A variety of weak acids are useful in the present invention. Preferred weak acids include carbonic acid, formed by the addition of carbon dioxide to an aqueous solution or suspension, phosphoric acid, sulfurous acid, and various carboxylic acids, such as acetic acid. As above, a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar, is useful in the invention. The concentration of weak acid should be from about 0.1 to about 1000 millimolar, preferably, from about 0.2 to about 100 millimolar.

Acid-stabilized calcium carbonate slurries having an acidic pH can also be obtained by adding a water soluble calcium salt and a calcium ion chelating agent to a calcium carbonate slurry. In combination, the calcium ion and the chelating agent provide lower pH values than can be obtained with calcium ion

- 8 -

alone. Preferred chelating agents include polycarboxylates, such as sodium EDTA and sodium polyacrylate. Typically, the chelating agent is added in a concentration of from about 0.01 to about 1000 millimolar, preferably, from about 0.1 to about 100 millimolar. Water soluble calcium salts of the type described above are used in
5 the typical and preferred concentrations listed above.

In a further embodiment, an acid-stabilized calcium carbonate slurry having an acidic pH can be generated by the addition of a weak acid that is capable of chelating calcium. Preferred weak acids that are capable of chelating calcium include polycarboxylic acids, such as EDTA, NTA, DTPA, and polyacrylic acid,
10 sulfonic acids, and polyphosphonic acids, phosphonic acids, or compounds containing phosphonic acid, such as nitrilotri(methylene)triphosphonic acid. The concentration of calcium chelating weak acids useful in the invention typically range from about 0.001 to about 1000 millimolar, preferably from about 0.01 to about 100 millimolar.

In each of the embodiments of the invention, the calcium ion concentration is increased, either by the direct addition of an acid-stabilizer in the form of a water soluble calcium salt, a weak acid, or a chelating agent. The addition of the weak acid typically generates calcium ion by reaction with the calcium carbonate in the slurry. The increase in calcium ion concentration lowers
20 the pH by decreasing the carbonate ion concentration through the common ion effect. Chelating agents maintain the calcium ion concentration, and stabilize the system. In addition, weak acids will typically buffer the system at a stable, suppressed pH. In general, an increase in either the calcium ion concentration or the weak acid concentration lowers the pH of the slurry. A calcium carbonate
25 slurry having a stable, lower pH is then acid-stabilized for use as a filler material in neutral or acidic paper.

Once formed, acid-stabilized calcium carbonate slurries prepared according to the present invention can be added to neutral or acid paper as a filler material during the papermaking process by any method known in the art for
30 forming a filled paper. Accordingly, the present invention includes a method of forming a filled paper comprising adding the acid-stabilized calcium carbonate slurry of the present invention to papermaking pulp in a process for making acid

paper and forming a filled paper by said process.

EXAMPLES

The following non-limiting examples are merely illustrative of the preferred embodiments of the present invention, and are not to be construed as limiting the invention, the scope of which is defined by the appended claims.

Example 1.

The effect of the addition of soluble calcium chloride and calcium acetate salts to increase the calcium ion concentration, or the addition of hydrochloric acid and acetic acid to generate the respective salts in situ on the pH of a 5 percent calcium carbonate slurry is illustrated in Figure 1. Five percent calcium carbonate slurries were prepared having calcium salt concentrations, either calcium chloride or calcium acetate, ranging from 0 to 250 millimolar. In each case, the pH was measured four days after each slurry was prepared. As can be seen in the graph in Fig. 1, an increase in the calcium salt concentration resulted in a drop in the pH of the slurry. This is typical for the addition of any water soluble calcium salt, or the addition of an acid to the slurry that will generate a water soluble calcium carbonate salt. Despite the acidic pH of the resulting slurries, the slurries were acid-stabilized, maintaining a concentration of calcium carbonate of about 5 percent with little or no decomposition of the carbonate.

Example 2.

The effect of the addition of a weak acid and of a weak acid and calcium ion on the pH of a 5 percent calcium carbonate slurry is illustrated in Figure 2. A 5 percent calcium carbonate slurry was prepared and placed under carbon dioxide at a pressure of one atmosphere. Under one atmosphere of CO₂, the pH of the slurry could be maintained at pH 6 for at least 10 days without the addition of calcium ion and little or no decomposition of the calcium carbonate in the slurry. The addition of calcium ion, added as calcium chloride, further suppressed the pH of the slurry to 5.8 with a calcium ion concentration of 20 millimolar, and to as low as 5.4 with a calcium ion concentration of 200 millimolar. As with the pH 6 slurry, the pH of the slurries acid-stabilized with carbon dioxide and calcium ion was stable for at least 10 days.

Example 3.

The effect of a constant concentration of sodium hexametaphosphate chelating agent ("SHMP") with various concentrations of calcium ion on the pH of a 5 percent calcium carbonate slurry after three days is shown in Figure 3. Five percent calcium carbonate slurries having an SHMP concentration of 0.7 millimolar and calcium ion concentrations of 2.4, 12, and 120 millimolar, added in the form of calcium chloride, were prepared. As shown in Figure 3, the pH of the calcium carbonate slurry decreases with increasing calcium ion concentration. However, when the chelating agent is present, the pH is lower than with calcium ion alone. For example, as shown in Fig. 1, the pH of a chelating agent free calcium carbonate slurry having a calcium ion concentration of 120 millimolar is about 6.3. The addition of a sufficient amount of calcium ion to form a slurry with a chelating agent concentration of 0.7 millimolar SHMP further lowers the pH to 5.5.

Example 4.

The effect of a compound containing a phosphonic acid group, i.e., nitrilotri(methylene)triphosphonic acid, on the pH of a 5 percent calcium carbonate slurry is shown in Figure 4. Five percent calcium carbonate slurries having acid concentrations of 0.4, 4 and 40 millimolar were prepared. In each case, the phosphonic acid reacted with a small portion of the calcium carbonate in the slurry, increasing the calcium ion concentration, and lowering pH. The solution was further stabilized by the chelation effect of the phosphonate that is formed and the buffering effect of the acid, which further lowers the pH. Systems of this type are highly effective in lowering the pH of the slurry with as little as 40 millimolar acid giving pH values of as low as 5.5.

While it is apparent that the invention disclosed herein is well calculated to fulfill the objects stated above, it will be appreciated that numerous modifications and embodiments may be devised by those skilled in the art. Therefore, it is intended that the appended claims cover all such modifications and embodiments that fall within the true spirit and scope of the present invention.

- 11 -

CLAIMS

1. An acid-stabilized calcium carbonate slurry for use in making acid paper, comprising:
water, calcium carbonate, and an acid-stabilizer selected from a group consisting of a water soluble calcium salt, a weak acid, a chelating agent, a mixture of a water soluble calcium salt and a weak acid, a mixture of a water soluble calcium salt and a chelating agent wherein the stabilizer is present in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and a pH of less than 7.
2. The acid-stabilized calcium carbonate slurry of claim 1, wherein the calcium carbonate is present in an amount of from about 1 to about 40 percent by weight.
3. The acid-stabilized calcium carbonate slurry of claim 1, wherein the calcium carbonate is precipitated calcium carbonate.
4. The acid-stabilized calcium carbonate slurry of claim 1, 2 or 3, wherein acid-stabilizer is a water soluble calcium salt present in an amount sufficient to provide a calcium ion concentration of from about 1 millimolar to about 5 molar.
5. The acid-stabilized calcium carbonate slurry of claim 4, wherein the water soluble calcium salt is present in an amount sufficient to provide a calcium ion concentration of from about 1 to about 120 millimolar.
6. The acid-stabilized calcium carbonate slurry of claim 4, wherein the calcium salt is calcium sulfate, calcium acetate, calcium nitrate, calcium citrate, a calcium halide, or a mixture thereof.
7. The acid-stabilized calcium carbonate slurry of claim 6, wherein the calcium halide is calcium chloride.
8. The acid-stabilized calcium carbonate slurry of claim 1, 2 or 3, wherein the acid-stabilizer is a weak acid present in an amount sufficient to provide a weak acid concentration of from about 0.1 to about 1000 millimolar.
9. The acid-stabilized calcium carbonate slurry of claim 8, wherein the weak acid is added in an amount sufficient to provide a weak acid concentration of from about 0.2 to about 100 millimolar.

- 12 -


10. The acid-stabilized calcium carbonate slurry of claim 8, wherein the acid-stabilizer further comprises a water-soluble calcium salt in an amount sufficient to provide a calcium ion concentration of from about 1 millimolar to about 5 molar.
11. The acid-stabilized calcium carbonate slurry of claim 10, wherein the
5 water soluble calcium salt is present in an amount sufficient to provide a calcium ion concentration of from about 1 to about 120 millimolar.
12. The acid-stabilized calcium carbonate slurry of claim 8, wherein the weak acid is carbonic acid, phosphoric acid, sulfurous acid, or a carboxylic acid.
13. The acid-stabilized calcium carbonate slurry of claim 1 or 3, wherein
10 the acid-stabilizer comprises a water soluble calcium salt in an amount sufficient to provide a calcium ion concentration of from about 1 millimolar to about 5 molar and a chelating agent in a concentration of from about 0.01 to about 1000 millimolar.
14. The acid-stabilized calcium carbonate slurry of claim 13, wherein the
15 water soluble calcium salt is present in an amount sufficient to provide a calcium ion concentration of from about 1 to about 120 millimolar and the chelating agent is present in a concentration of from about 0.1 to about 100 millimolar.
15. The acid-stabilized calcium carbonate slurry of claim 13, wherein the chelating agent is a polycarboxylate.
- 20 16. The acid-stabilized calcium carbonate slurry of claim 15, wherein the polycarboxylate is sodium ethylenediaminetetraacetic acid (EDTA) or sodium polyacrylate.
17. The acid-stabilized calcium carbonate slurry of claim 1, 2 or 3, wherein the acid-stabilizer is a weak acid capable of chelating calcium ion, present
25 in a concentration of from about 0.001 to about 1000 millimolar.
18. The acid-stabilized calcium carbonate slurry of claim 17, wherein the weak acid is present in a concentration of from about 0.01 to about 100 millimolar.
19. The acid-stabilized calcium carbonate slurry of claim 17, wherein the weak acid is a polycarboxylic acid, polyacrylic acid, sulfonic acid, polyphosphonic
30 acid, or a compound containing a phosphonic acid.
20. The acid-stabilized calcium carbonate slurry of claim 19, wherein the weak acid is ethylenediaminetetraacetic acid (EDTA), nitrilotriacetic acid (NTA),

- 13 -

diethylenetriaminepentaacetic acid (DTPA), or nitrilotri(methylene)triphosphonic acid.


21. A method of forming a filled paper, comprising adding the acid-stabilized calcium carbonate slurry of any of claims 1, 2 or 3, to a papermaking
5 pulp in a process for making acid paper; and forming a filled paper by said process.
22. A method for making an acid-stabilized calcium carbonate slurry having a pH of less than 7, which comprises:
forming a slurry comprising water, calcium carbonate, and a acid-stabilizer selected from a group consisting of a water soluble calcium salt, a weak
10 acid, a chelating agent, a mixture of a water soluble calcium salt and a weak acid, a mixture of a water soluble calcium salt and a chelating agent wherein the stabilizer is present in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and a pH of less than 7.
23. The method of claim 22, further comprising first carbonating an
15 aqueous slurry of calcium hydroxide to form a precipitated calcium carbonate slurry.
24. A filled acid paper, comprising a filler produced in accordance with the method of claim 22.

Figure 1. The Effect of Calcium Chloride and Calcium Acetate on the pH of a Calcium Carbonate Slurry

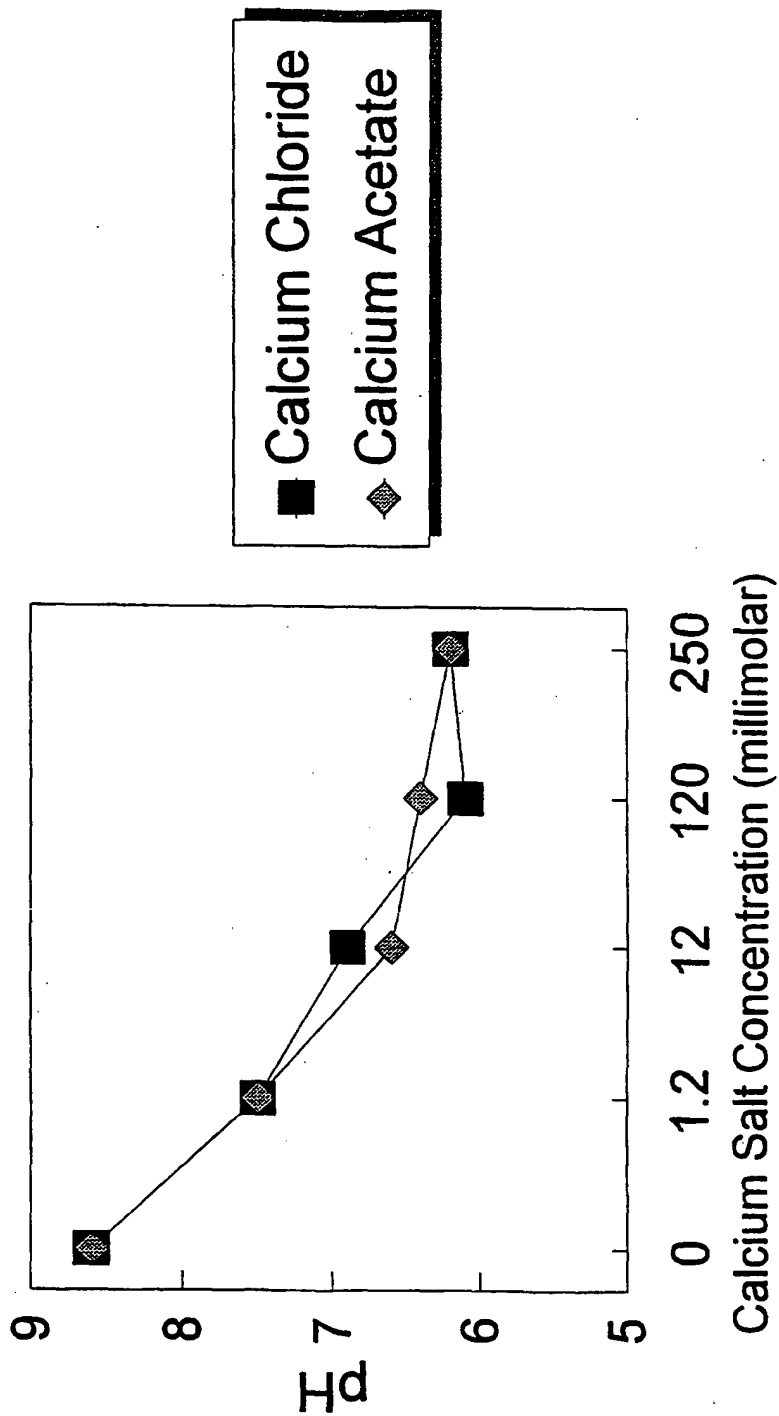


The slurry contains 5% calcium carbonate and the pH was measured after 4 days.

Figure 2. The Effect of Carbon Dioxide and Calcium Ion on the pH of a Calcium Carbonate Slurry

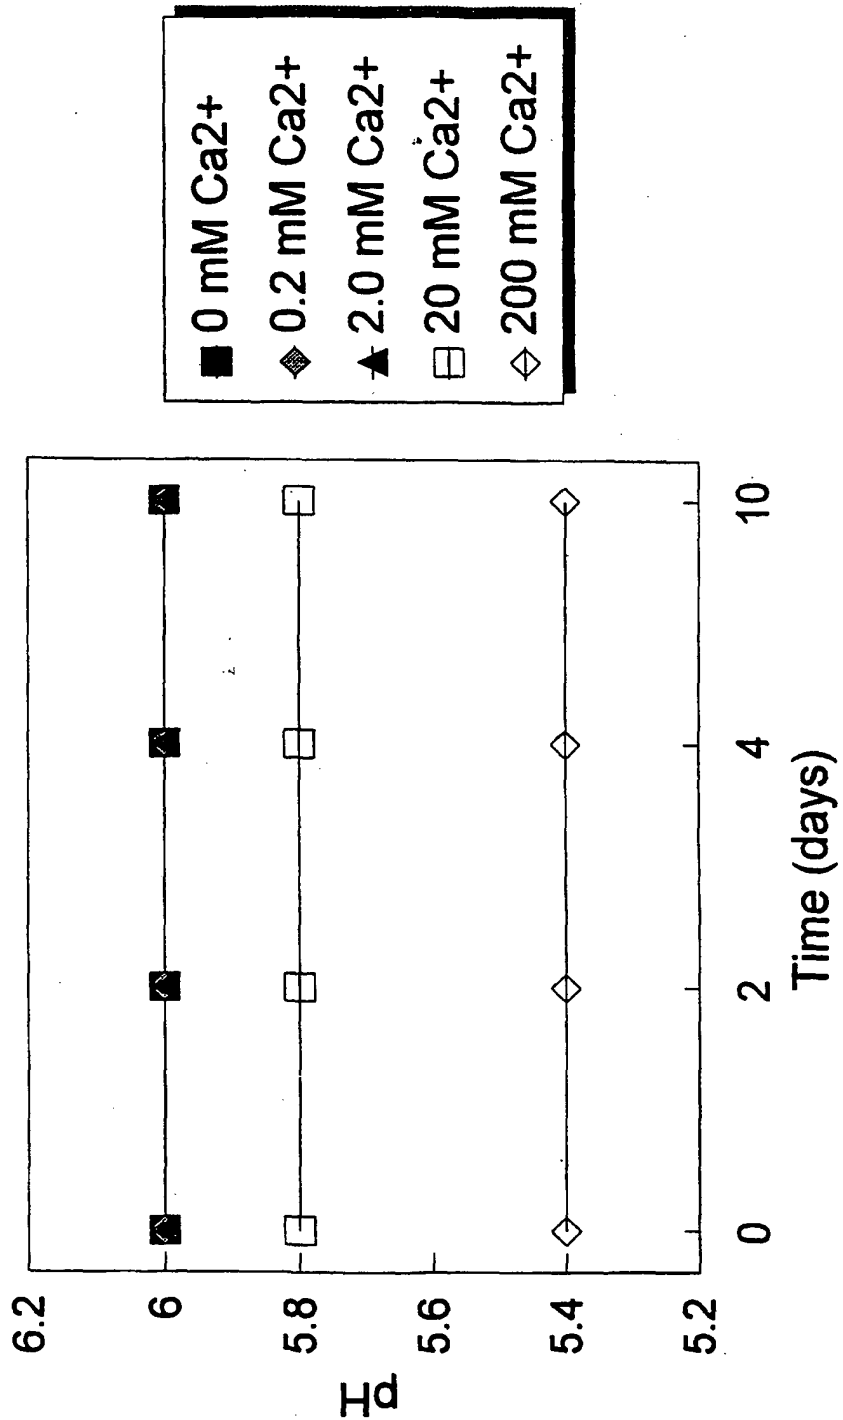


The slurry contains 5% precipitated calcium carbonate under one atmosphere of carbon dioxide.

**Figure 3. The Effect of Calcium Ion Plus Chelate
on the pH of a Calcium Carbonate Slurry**

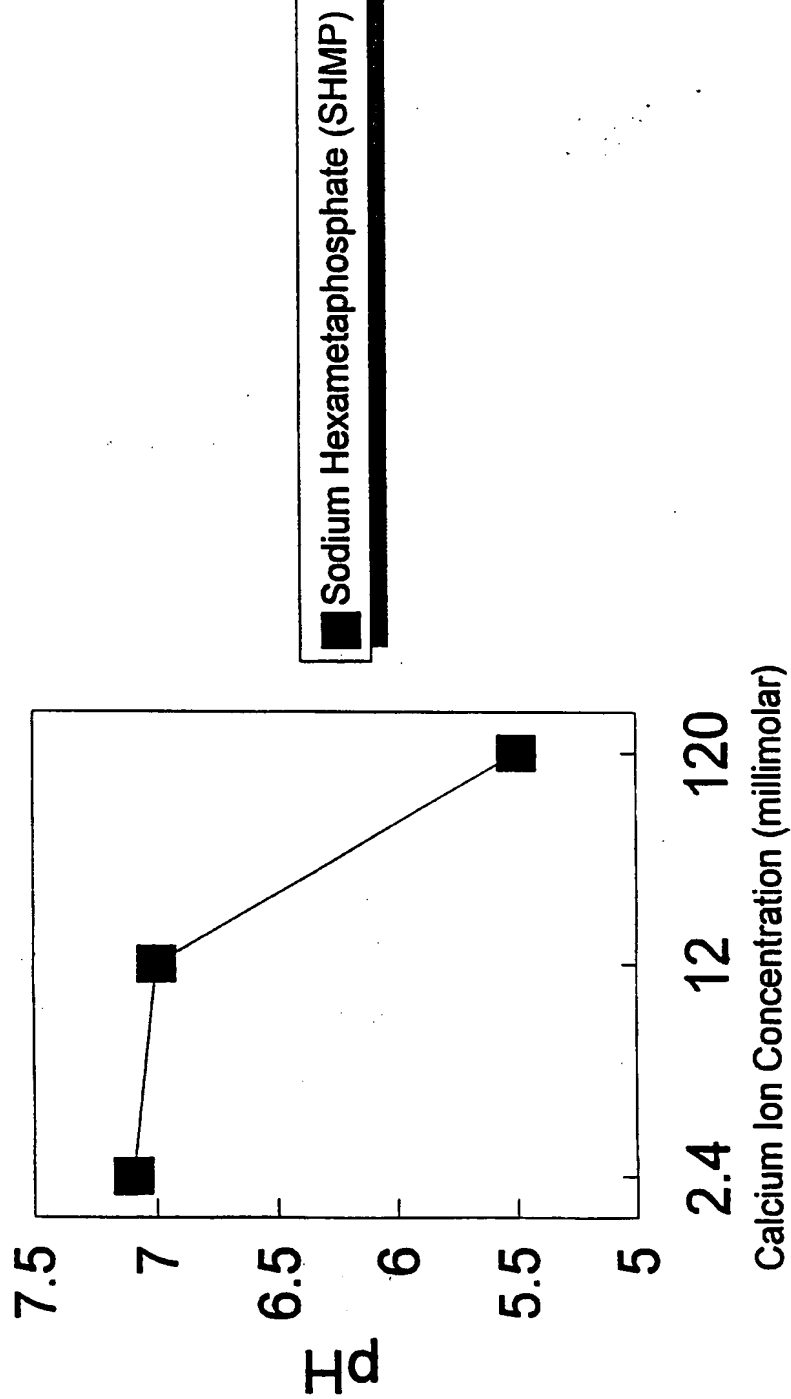

The slurry contained 5% calcium carbonate and 0.7 millimolar SHMP and the pH was measured after 3 days.

Figure 4. The Effect of Phosphonic Acids on the pH of a Calcium Carbonate Slurry

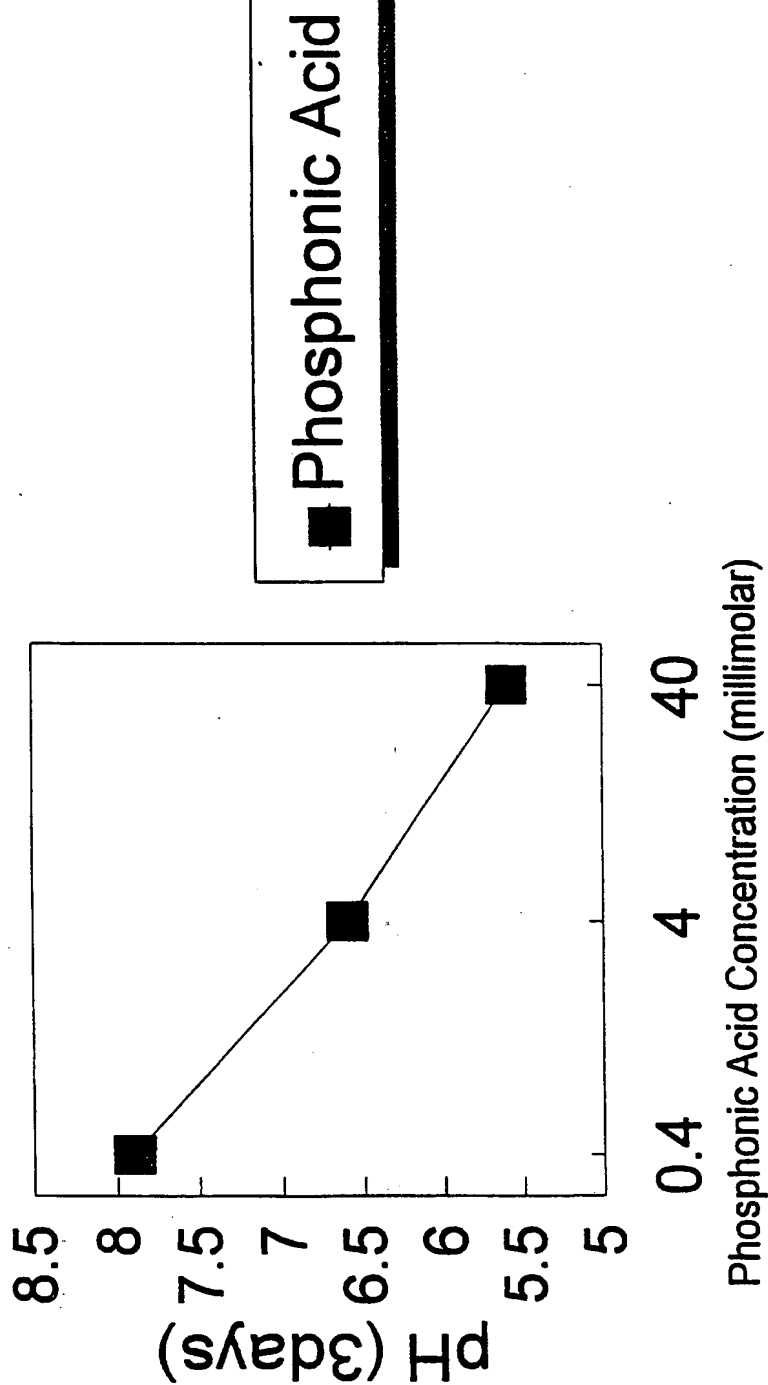


The slurry contained 5% calcium carbonate and the acid was Nitritotri(methylene)triphosphonic Acid



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C01F 11/18, D21H 17/71 // D21H 17:67, 17:65, 17:66, 17:07	A3	(11) International Publication Number: WO 98/29601 (43) International Publication Date: 9 July 1998 (09.07.98)
(21) International Application Number: PCT/US97/23151 (22) International Filing Date: 5 December 1997 (05.12.97) (30) Priority Data: 08/774,662 30 December 1996 (30.12.96) US (71) Applicant: MINERALS TECHNOLOGIES INC. [US/US]; 405 Lexington Avenue, New York, NY 10174-1901 (US). (72) Inventor: DRUMMOND, Donald, Kendall; 11 Laurel Lane, Clenmoore, PA (US). (74) Agents: RICHARDS, John; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US) et al.	(81) Designated States: AU, BR, CA, CN, JP, KR, MX, NO, NZ, PL, RU, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. (88) Date of publication of the international search report: 11 September 1998 (11.09.98)	

(54) Title: THE USE OF CALCIUM CARBONATE IN AN ACIDIC AQUEOUS MEDIA

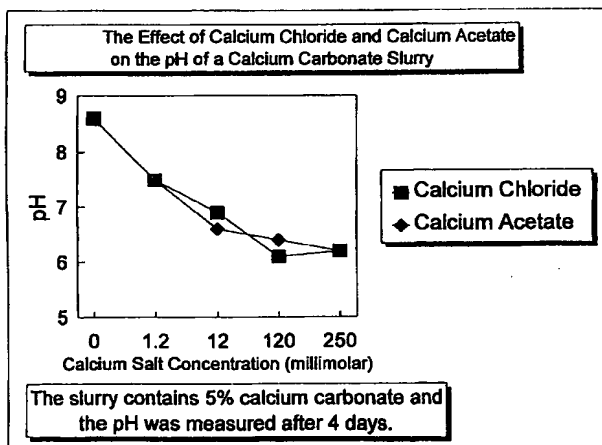

(57) Abstract

The present invention relates to an acid-stabilized calcium carbonate slurry having a pH of less than 7, preferably between about 6 and about 7, containing water, calcium carbonate, preferably precipitated calcium carbonate, and an acid-stabilizer of a water soluble calcium salt, a weak acid, a chelating agent, a weak acid capable of chelating calcium ion, or a mixture thereof. The acid-stabilizer is present in an amount sufficient to provide an aqueous calcium carbonate slurry having an increased calcium ion concentration and an acidic pH. In a typical acid-stabilized calcium carbonate slurry of the invention, the acid-stabilizer is present in an amount sufficient to provide a calcium ion concentration of about 1 millimolar to about 5 molar, preferably from about 1 to about 120 millimolar. The invention also relates to a method of making the acid-stabilized calcium carbonate slurry of the invention, to a method of forming a filled paper, that includes the step of adding the acid-stabilized calcium carbonate slurry of the invention to a papermaking pulp in a process for making acid paper, and to a filled paper produced according to the method of the invention.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

In tional Application No
PCT/US 97/23151

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 C01F11/18 D21H17/71 //D21H17:67,D21H17:65,D21H17:66, D21H17:07		
According to International Patent Classification(IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 C01F D21H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	WO 97 14651 A (ECC INT INC) 24 April 1997 see page 6, line 18 - line 25 see page 7, line 7 - line 23 ---	1,3,6, 21-24
X	WO 96 26901 A (AECI LTD) 6 September 1996 see abstract see page 1, column 2 ---	1,3-6, 13,21, 22,24
X	US 5 156 719 A (PFIZER INC) 20 October 1992 cited in the application see column 1, line 27 - line 28 see column 4, line 62 - column 5, line 65 --- -/--	1,3,8, 12,16, 21-24
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
* Special categories of cited documents :		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">12 June 1998</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">16/07/1998</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Naeslund, P</div>

INTERNATIONAL SEARCH REPORT

In ternational Application No

PCT/US 97/23151

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 043 017 A (PFIZER CORP) 27 August 1991 cited in the application see column 1, line 27 - line 28 see column 4, line 62 - column 5, line 65 ---	1,3,8, 12,16, 21-24
A	W. E. SCOTT, PH.D.: "Principles of Wet End Chemistry" 1996 , TAPPI PRESS , ATLANTA, GA XP002067909 "b. Calcium carbonate" see page 70 ---	1,3,23
A	US 4 888 160 A (HUBER CORP J M) 19 December 1989 see the whole document -----	1,3,23

INTERNATIONAL SEARCH REPORT

Information on patent family members

In ternational Application No

PCT/US 97/23151

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9714651	A	24-04-1997	US 5647902 A AU 7448696 A	15-07-1997 07-05-1997
WO 9626901	A	06-09-1996	AU 4836896 A CA 2213750 A	18-09-1996 06-09-1996
US 5156719	A	20-10-1992	US 5043017 A AU 665634 B AU 3870393 A AU 7276691 A CA 2035808 A,C DE 69121605 D DE 69121605 T EP 0445952 A ES 2091866 T FI 911183 A JP 4227665 A MX 166378 B	27-08-1991 11-01-1996 05-08-1993 10-10-1991 10-09-1991 02-10-1996 06-03-1997 11-09-1991 16-11-1996 10-09-1991 17-08-1992 04-01-1993
US 5043017	A	27-08-1991	AU 665634 B AU 3870393 A AU 7276691 A CA 2035808 A,C DE 69121605 D DE 69121605 T EP 0445952 A ES 2091866 T FI 911183 A JP 4227665 A MX 166378 B US 5156719 A	11-01-1996 05-08-1993 10-10-1991 10-09-1991 02-10-1996 06-03-1997 11-09-1991 16-11-1996 10-09-1991 17-08-1992 04-01-1993 20-10-1992
US 4888160	A	19-12-1989	US 5338777 A US 5055284 A	16-08-1994 08-10-1991